

LMX-0802 Series

8-Port Industrial Managed Ethernet Switches, w/6*10/100Tx, 2*100Fx, 12~48VDC Power Input



Features


- ▶ Supports 6*10/100Tx and 2*100Fx (SC/ST Connectors in Multi or Single Mode Fiber)
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ System Warning Setting for Automatic Warning through E-mail
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp –STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LMX-0802 series is an 8-port industrial managed Ethernet switch that is embedded with 6*10/100Tx Ethernet ports and 2*100Fx fiber ports that support SC or ST connections in either Single or Multi-Mode fiber. The LMX-0802 series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0802 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

DIMENSIONS

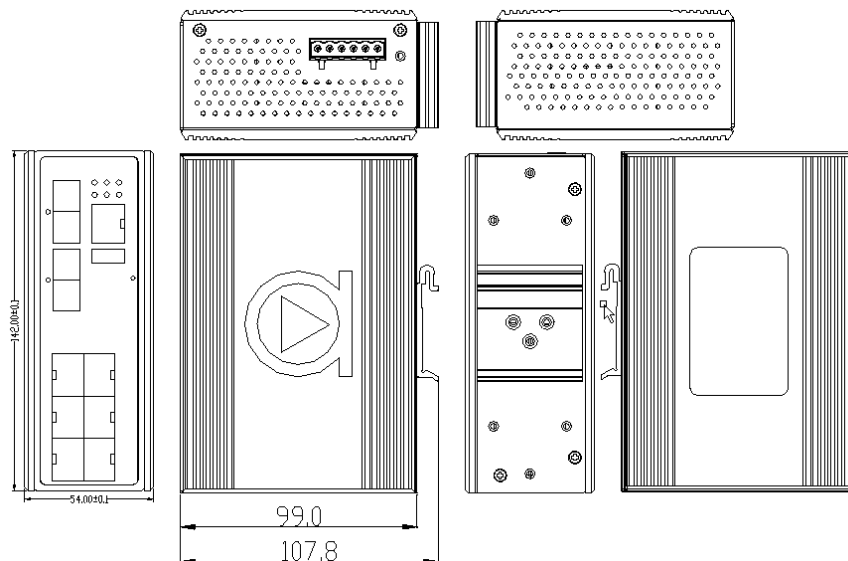

SPECIFICATIONS

Technology		IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol)
Standards		IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
Protocol		IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6
Switch Properties		
Configuration	Web Console, Telnet, CLI	
Processing Type	Store and Forward	
Flow Control	IEEE 802.3x for full duplex mode, back pressure for half duplex mode	
Transfer Rate	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet	
Packet Buffer	4 Mbits	
Jumbo Frame	-	
MAC Table Size	8K	
VLAN Group	1 ~ 4094	
IGMP Group	Up to 256 Groups	
Port Interface		
Ethernet RJ45 Port	6*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI connection	
Fiber Ports	2*100Fxm SC or ST in Single or Multi-Mode	
Wavelength	Dependent on Fiber type and Distance	
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1	
Configuration Backup	1*USB 2.0	
Protection		
Overload Current	Present	
Power Reverse Polarity	Present	
CPU Watchdog	Present	
Network Cable		
	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)	
Mechanical Characteristics		
LED Indicator	Per Unit: Power 1 & 2 (Green), Fault (Green/Red)	
Housing	Metal IP30 rated	
Dimension	54 x 142 x 99 mm	
Weight	Unit: 2.4 lbs.; Shipping: 2.9 lbs.	
Mounting	DIN-Rail; Wall-Mount (optional)	
Power Requirement		
Input Voltage	12~48VDC Redundant Input	
Power Connection	1 removable 6-contact terminal block	
Power Consumption	15 Watts	
Environmental Limits		
Operating Temperature	STD: -10 to 70°C EOT: -40 to 75°C	
Storage Temperature	-40°C ~ 85°C	
Ambient Relative Humidity	5 to 95%, (non-condensing)	
Regulatory Approvals		
EMI	FCC Class A	
EMS	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4	
Free Fall	IEC60068-2-32	
Shock	IEC60068-2-27	
Vibration	IEC60068-2-6	
Green	RoHS Compliant	
Certifications	FCC, CE, UL-61010-2-201(pending)	
Warranty	5 Years	

ORDERING INFO

LMX-0802-M	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm MM SC Fiber Ports
LMX-0802-M-T	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm MM SC Fiber Ports ; EOT: -40° to 75°C
LMX-0802-ST-M	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm MM ST Fiber Ports
LMX-0802-ST-M-T	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm MM ST Fiber Ports ; EOT: -40° to 75°C
LMX-0802-S3	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm SM SC Fiber Ports
LMX-0802-S3-T	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm SM SC Fiber Ports ; EOT: -40° to 75°C
LMX-0802-ST-S3	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm SM ST Fiber Ports
LMX-0802-ST-S3-T	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100Fxm SM ST Fiber Ports ; EOT: -40° to 75°C

Optional Accessories

DR-75-48	75W Industrial Din Rail Power Supply (48VDC)
DR-120-48	120W Industrial Din Rail Power Supply (48VDC)
SDR-240-48	240W Industrial Din Rail Power Supply (48VDC)
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
DIN-RACK-2U	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height